



UFO E1 Eyeball

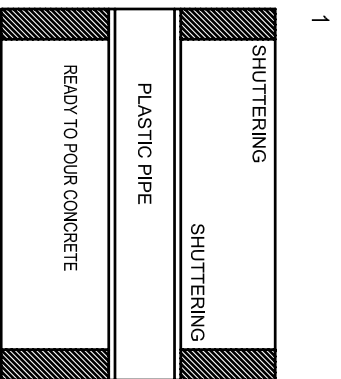


1

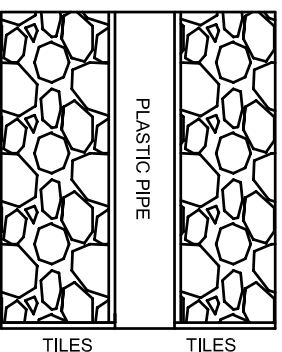

2


TILES APPLIED TO SURFACE TO LEAVE NEAT HOLE THE SIZE OF THE INNER DIAMETER OF THE PIPE
TILES MUST BE LEVEL TO ENSURE A GOOD SEAL

REMOVE SHUTTERING THEN CUT PIPE LEVEL WITH CONCRETE

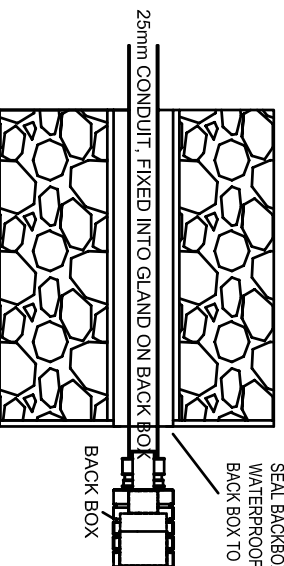

3


SEAL BACKBOX INTO PIPE USING WATERPROOF SEALANT
BACK BOX TO BE LEVEL WITH TILING

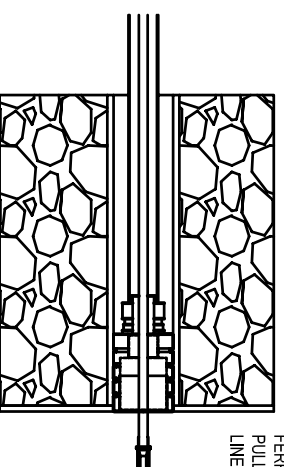

4

FIBRE OPTIC TAIL FED THROUGH CONDUIT AND BACK BOX READY FOR FITTING TO SCREW ON TO FERRULE
PULL TAIL THROUGH USING DRAW LINE


LOOSEN EYEBALL LOCKING RING WITH LARGE CIRCLIP PLIERS

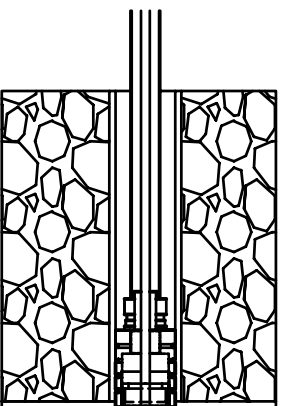

5

SCREW EYEBALL ON TO FERRULE TO ACHIEVE DESIRED FOCUS

APPLY SEALANT TO BACK OF FLANGE, LUBRICATE THREAD AND SCREW
FLANGE INTO BACK BOX

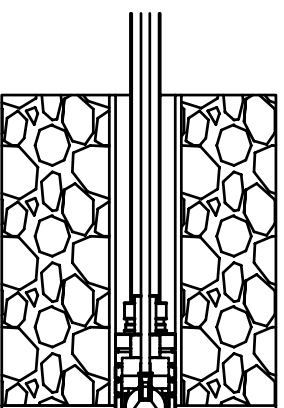

6

LUBRICATE THREAD THEN TIGHTEN LOCKING RING INTO FLANGE TO SEAL EYEBALL IN PLACE